


# FPDELTABELLMOD

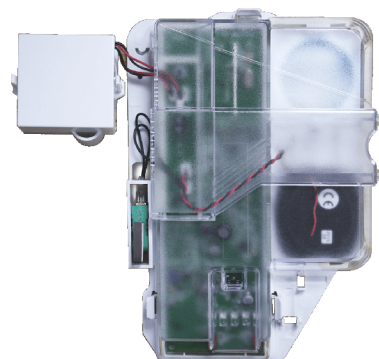

**SOUNDERS TECHNICAL CHARACTERISTICS**

<b>Sound Output</b>	94 dB(A)
<b>Sound and light indication on alarm</b>	Yes
<b>Engineer hold off</b>	No
<b>Flashing LED Strobe</b>	Yes
<b>Comfort LED</b>	Selectable Enabled/Disabled
<b>Back-lit</b>	No
<b>Tamper protection</b>	Yes
<b>Strobe duration and frequency</b>	10ms, 1Hz
<b>Sounder maximum duration</b>	15 mins
<b>SAC (self actuating bell) / SAB (self activating bell) option</b>	Yes
<b>External Remote 12 Volt DC Input</b>	Yes
<b>Built in Spirit Level</b>	Yes
<b>Levelling aid</b>	Yes

**ENFORCER TWO-WAY WIRELESS TECHNOLOGY**

<b>Signal Strength Indicators (SSI)</b>	Yes
<b>Instant two way device control (ITDC)</b>	Yes
<b>Pyronix high security two way wireless data encryption protocol (TDE)</b>	Yes
<b>Pyronix intelligent jamming detection</b>	Yes
<b>Programmable wireless supervision time</b>	Yes
<b>868MHz transceiver FM technology</b>	Yes
<b>One push to learn</b>	Yes
<b>Transmission range</b>	300m in open space

**COMMUNICATIONS AND MODEMS**

**Supports PyronixCloud & HomeControl+ App** If used with HomeControl+ Panel (UK) or Enforcer 32-WE App (Export)

**ENVIRONMENTAL AND OPERATING FEATURES**

<b>Certified operating temperature</b>	-25C to 60C
<b>Nominal operating temperature</b>	-30C to 60C
<b>Physical dimensions (H x W x D)</b>	290 x 285 x 50 mm

**ELECTRICAL & BATTERY**

<b>Battery type</b>	2x 3V 4700mAh Lithium battery packs (BATT-ES1)
<b>Battery life</b>	2 years
<b>Battery low voltage protection</b>	Yes
<b>Operating voltage</b>	9-16 v